


ADJUSTABLE COVER SEAM FOOT FOR COVERSTITCH INTERLOCK MACHINES

Yamato DV/DW/VC/VF/VG - Pegasus W500/600/700 - Siruba - Kingtex -
 Union Special 52800/52900/34700 - Kansai W/V/WX/RX/etc.

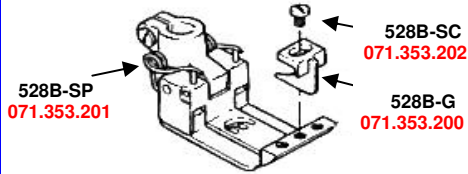

Ref : 528 B
 Special cover seaming foot

With adjustable blade

- 528B-232 (2-nld - 3,2mm or 1/8") **071.353.232**
- 528B-348 (3-nld - 4,8mm or 3/16") **071.353.348**
- 528B-360 (3-nld - 6,0mm) **071.353.360**
- 528B-240 (2-nld - 4,0mm or 5/32") **071.353.240**
- 528B-356 (3-nld - 5,6mm or 7/32") **071.353.356**
- 528B-364 (3-nld - 6,4mm or 1/4") **071.353.364**
- 528B-248 (2-nld - 4,8mm or 3/16") **071.353.248**



Ref : 528 HR (right)
 Compensating edge guide foot


Best for hemming and edging operations.

- 528HR-232 (2-nld - 3,2mm)
- 528HR-240 (2-nld - 4,0mm)
- 528HR-348 (3-nld - 4,8mm)
- 528HR-356 (3-nld - 5,6mm) **071.353.456**
- 528HR-364 (3-nld - 6,4mm) **071.353.464**
- 528HR-248 (2-nld - 6,4mm) **071.353.448**




Ref : 528 D
 Covering seam foot

- 528D-356 (3-nld - 5,6mm) **071.353.556**
- 528D-364 (3-nld - 6,4mm) **071.353.564**

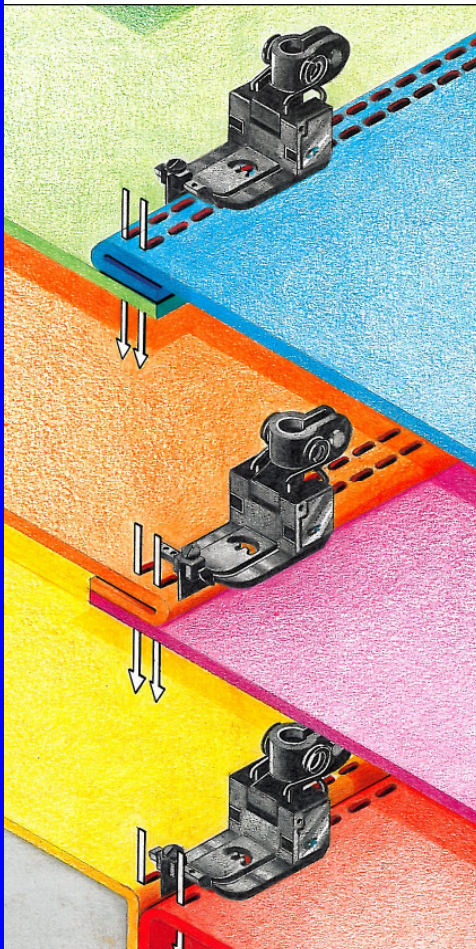

COVER SEAMING NEEDLE PLATES

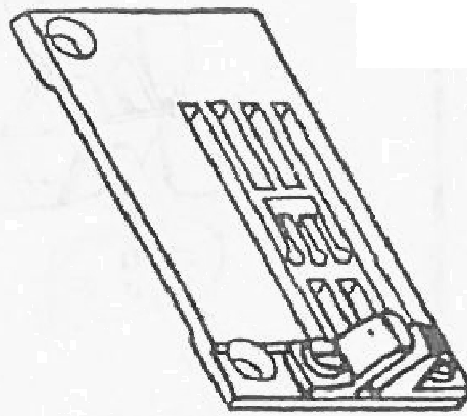

Features :

1. Best result in conjunction of the use of foot #528B
2. No need to change feed dogs. Just use original feeders.

- 94801 CS - 3-ndl. - 5,6mm. - Yamato **071.353.156**
- 94802 CS - 3-ndl. - 6,4mm. - Yamato **071.353.164**
- 14-854CS - 3-ndl. - 5,6mm. - Kansai **071.353.256**
- 14-864CS - 3-ndl. - 6,4mm. - Kansai **071.353.264**
- 257018CS56-3-ndl.-5,6mm.- Pegasus **071.353.356**
- 257018CS64-3-ndl.-6,4mm.- Pegasus **071.353.364**

